



PCT

WORLD INTELLECTU.  
Intern

WO 9604582A1


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G02B 26/08, H04N 9/31, G09F 9/37</b>		A1	(11) International Publication Number: <b>WO 96/04582</b>
			(43) International Publication Date: 15 February 1996 (15.02.96)
(21) International Application Number: <b>PCT/GB95/01842</b>			(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 2 August 1995 (02.08.95)			
(30) Priority Data: 9415771.6 4 August 1994 (04.08.94) GB 9418863.8 19 September 1994 (19.09.94) GB			
(71) Applicant (for all designated States except US): <b>RANK BRIMAR LIMITED [GB/GB]; Greenside Way, Middleton, Manchester M24 1SN (GB).</b>			
(72) Inventor; and (75) Inventor/Applicant (for US only): <b>FIELDING, Raymond, Gordon [GB/GB]; 45 Cecil Street, Royton, Oldham OL2 5NE (GB).</b>			
(74) Agents: <b>BERESFORD, Keith, Denis, Lewis et al.; Beresford &amp; Co., 2-5 Warwick Court, High Holborn, London WC1R 5DJ (GB).</b>			

Published

*With international search report.  
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: **DISPLAY SYSTEM**

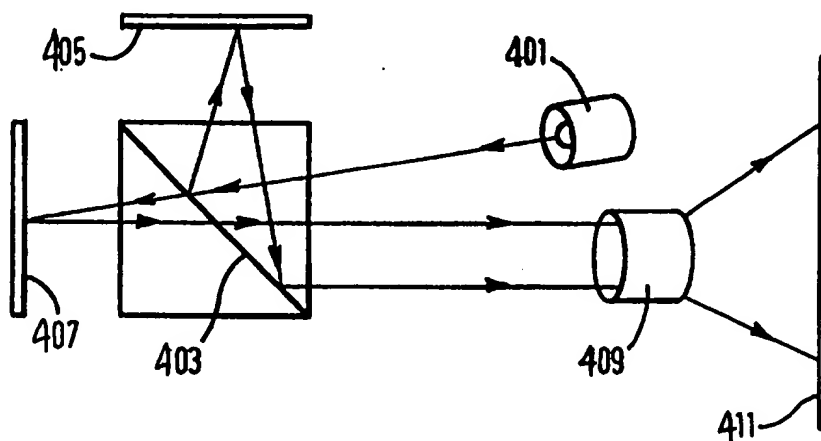

(57) Abstract

A projecting display system includes a light source (101) which produces light which is spatially modulated by a number of spatial light modulators (105, 107). A splitting means (103) is provided in the light path between the light source (101) and the spatial light modulators (105 and 107) such that the overall luminous flux producible by the system is not determined by the maximum luminous flux which each spatial light modulators (105, 107) can accommodate.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DISPLAY SYSTEM

This invention relates to display systems. The invention has particular, although not exclusive, relevance to display systems including a projection system in which light from a light source is modulated by a spatial light modulator device, the modulated light then being projected onto a projection screen.

Spatial light modulator devices suitable for use in such projection systems may take several forms.

One example of a spatial light modulator device is a liquid crystal device comprising a matrix of individually addressable liquid crystal pixels. Such spatial light modulators may act either in a transmissive mode in which the light passes through the pixels of the liquid crystal device, or in a reflective mode in which the light is reflected by each pixel of the liquid crystal device.

20

Another example of a spatial light modulator device is a deflectable mirror device (DMD) which comprises an array of mirrored cantilever beam structures, each structure carrying an electrode so as to be electrostatically deflectable between two positions. Thus, dependent on the electric field applied to the device, each mirrored structure will reflect an incident

- 2 -

- light beam into two alternative light paths, either towards an optical system for projection onto a projection screen, or alternatively into a beam dump. Using an array of such structures, each structure being
- 5 individually addressable by part of the incoming light beam, the incoming light beam can be spatially modulated with a two dimensional image which can then be projected onto the projection screen.
- 10 Known projection systems in which light from a light source is modulated by a spatial light modulator device suffer the disadvantage that there is often a limit in the amount of light flux which can be directed onto the spatial light modulator. This limit is caused by, for
- 15 example limitations associated with the heating effect of the radiant flux, or saturation due to a high luminous flux. Where projection systems are limited in light output, two or more projection systems may be "stacked" by placing the projection systems adjacent to each other
- 20 such that the projected images are superimposed on the projection screen, producing an overall bright image. However, such an arrangement is both inefficient and space consuming.
- 25 US-A-5035475 discloses a display system comprising two spatial light modulators in the form of an array of movable mirrors. Baffles in the form of rows of parallel

- 3 -

slits are interposed in the light path between the light source and the two mirror arrays. A beam splitter is effective to split light from the light source between the two mirror arrays, and to recombine light reflected  
5 along the normals to the mirror arrays. The baffles are effective to absorb light which is reflected along other directions. By use of the two mirror arrays, the images produced by the two arrays may be interleaved to remove dark stripes in the projected images which are produced  
10 by the two baffles. However in such arrangement the flux of the light in the final projected image is still limited by the flux of light produced by each mirror array.

15 Problems also occur in colour projection systems comprising one or more spatial light modulator devices. In order to achieve a colour projection system it is known to split the incoming light by one or more spectral splitting devices, for example, dichroic mirrors into  
20 three primary colour channels. An example of such a prior art system is shown in Figure 1 which is a schematic diagram of an overview of a colour projection system using three spatial light modulators in the form of DMDs.

25

Referring to Figure 1, the particular example of a display system to be described is arranged to project a

- 4 -

colour image onto a display screen 101. The display system includes a light source 103 arranged such that the beam from the source is directed onto three planar deflectable mirror display devices 105,107,109. described.

Positioned in the light path between the light source 103 and the first deflectable mirror device 105 are two dichroic mirrors 111,113. The first dichroic mirror 111 is designed and angled to reflect blue light onto the second planar deflectable mirror display device 107 and transmit all other incident light. The second dichroic mirror 113 is designed and angled so as to reflect red light onto the third planar deflectable mirror device 109 and transmit the remaining green component of the light from the source 103 onto the first deflectable mirror display device 105.

The three deflectable mirror devices 105,107,109 are arranged to be capable of reflecting the three colour components of the beam from the source 103 so as to direct the spatially modulated beam through a projection lens 115 onto the display screen 101.

However such arrangements do not take account of the fact that the luminous flux of the various spectral components, for example the primary colours red, green

- 5 -

and blue within white light, is unequal.

It is an object of the present invention to provide a display device in which the above problems of limited  
5 output light are at least alleviated.

According to a first aspect of the present invention there is provided a display system comprising a plurality of spatial light modulators and including extra spatial  
10 light modulators designed to increase the total light flux spatially modulated by the modulators.

According to a second aspect of the present invention there is provided a display system comprising: a light  
15 source; at least two spatial light modulators; means for splitting light of the same spectral composition from the light source between the spatial light modulators; means for combining spatially modulated light produced by the spatial light modulators; and means for displaying the  
20 combined light such that the combined light is of greater light flux than the light produced by any of the spatial light modulators.

According to a third aspect of the present invention  
25 there is provided a display system comprising: a multi wave length light source; a plurality of spatial light modulators; wavelength selective means for splitting

- 6 -

light of different spectral composition between the spatial light modulators; means for combining spatially modulated light produced by the spatial light modulators; and means for displaying the combined light; wherein  
5 there are provided sufficient spatial light modulators to increase the balance of the division of the light flux produced by the light source between the spatial light modulators.

10 The means for displaying suitably comprising means for projecting the combined light onto a projection screen.

A number of embodiments of the invention will now be described by way of example only with reference to the  
15 accompanying figures in which:

Figure 1 is a schematic diagram of an overview of a prior art colour projection system as has already been described;

20

Figure 2 is a schematic diagram illustrating the operation of a DMD;

Figure 3 illustrates the illumination of a mirror device  
25 in the array of Figure 2;

Figure 4 is a schematic diagram of a display system in



- 7 -

accordance with a first embodiment of the invention;

Figure 5 is a schematic diagram of a display system in accordance with a second embodiment of the invention; and

5

Figure 6 is a schematic diagram of a display system in accordance with a third embodiment of the invention.

Referring firstly to Figures 2 and 3, each deflectable  
10 mirror device (DMD), for use in a display system in accordance with an embodiment of the invention comprises an array 117 of  $m \times n$  deflectable mirror devices, typically 768 x 576 mirror devices for a low resolution display system or 2048 x 1152 mirror devices for a high  
15 resolution display system. Each array 117 is connected to a driver circuit 119 which receives an electronic colour video signal from the control circuit indicated generally as 121, and addresses each of the mirror devices  $M_{11}$ - $M_{mn}$  as, for example, described in the  
20 applicant's earlier International Patent Application, PCT/GB92/00002 dated 4th January 1992 (incorporated herein by reference).

Dependent on the applied address signal, each mirror  
25 device M is caused to take one of two different positions corresponding to an "on" state in which light reflected from the mirror device M is directed in a first path 123

- 8 -

and an "off" state in which the reflected light is directed in a second path 125. The second path 125 is chosen such that light reflected along this path is directed away from the optical axis of the display system  
5 and thus does not pass into the projection lens (not shown in Figures 2 and 3).

Thus, each DMD array 117 is capable of representing a two dimensional image, those mirror devices M which are  
10 tilted to the "on" state appearing bright and those which are tilted to the "off" state appearing dark. By varying the ratio of the "on" period to "off" period, that is by a temporal modulation technique, grey scale can be achieved.

15  
Turning now particularly to Figure 3 the angle through which each mirror device M is deflected between the "on" state and the "off" state is relatively small. Thus in order to achieve good discrimination between the "on" and  
20 "off" states the incident light beam 127 from the source 103 is directed towards each spatial light modulator 105,107,109 at an angle measured from the normal to each device of around 20°.

25 When an individual mirror device M is lying parallel to the plane of the array 117, an incident beam 127 from, for example an arc lamp (not shown in Figure 3) is

- 9 -

reflected at a corresponding angle of  $20^\circ$  to the normal along an "off" path 122 into a beam dump (not shown). When the control signal from the driver circuit 119 sets the mirror device M into a first deflection state at a first angle to the plane of the array 117, the incident beam 127 is reflected along the direction 125 in a further "off" path into the beam dump. When the control signal from the addressing circuit 119 sets the mirror device M into a second deflection state at a second angle to the plane of the array 117, the incident beam 127 is reflected out along the normal to the array along the "on" path 123.

Turning now to Figure 4, in the first embodiment of the display device in accordance with the invention, a light source 401, for example an arc lamp, is arranged to direct light onto a half silvered mirror 403. The half silvered mirror 103 is effective to split the incident light between two spatial light modulators 405, 407 each in the form of a DMD. Spatially modulated light from the DMDs 405, 407 is recombined at the mirror 403, from which it passes through a projection lens 409 to be projected onto a projection screen 411. The DMDs operate as described in relation to Figures 2 and 3 in order to spatially modulate the incoming beam to produce an image for projection screen 411.

- 10 -

It will be seen that by use of the half silvered mirror 403, the light which would in prior art arrangements have been incident on a single DMD is split between the two DMDs 405, 407. Thus the luminous flux incident on the projection screen 411 is twice that which would have been possible using a single DMD as in the prior art arrangements.

It will be appreciated that other forms of light splitters to a half silvered mirror may be used to split the incident light beam between the two DMDs 405, 407. One possibility is to replace the half silvered mirror 403 in Figure 4 by a polarizing beam splitter. The polarizing beam splitter will be effective to split incident light from the light source 401 into P-polarized and S-polarized light. The P-polarized light is directed to one of two DMDs 405, 407 and the S-polarized light is directed towards the other of the DMDs 407 or 405. The polarizing splitter 401 will then recombine the spatially modulated light from the two DMDs 405, 407 for transmission to the projector lens 409.

It will be appreciated that a polarized splitter is more efficient than a half silvered mirror. The optical losses produced by the insertion of such a polarizing splitter will typically be 1-3% of the incident beam compared to the 20-30% losses produced by a mirror

- 11 -

surface. However even if a relatively high loss beam splitter is used it is found that a higher light flux projected image may be produced than would otherwise have been possible.

5

Referring now to Figure 5, the second embodiment of the invention to be described is a multi-colour projection system. As seen in Figure 5 the multi colour projection system includes four spatial light modulators in the form of DMDs 501, 503, 505 and 507. Three dichroic mirrors 509, 511 and 513 are arranged in the light path between the DMDs 501, 503, 505 and 507 and a white light source (not shown). The first dichroic mirror 509 in the light path is arranged to reflect red light onto the DMD 501 and transmit all other light. The second dichroic mirror 511 is arranged to reflect blue light onto the DMD 503 and to transmit the remaining green light. The third dichroic mirror 513 is designed to have a closely controlled band-pass characteristic so as to reflect part of the incident green light with a chosen spectral content onto the third DMD 505 and to transmit the remaining green light onto the fourth spatial light modulator 507.

25 Each DMD 501, 503, 505 and 507 is driven by address signals as described in relation to Figures 2 and 3 to provide an appropriately spatially modulated image in one

- 12 -

of the primary colours red and blue and the two spectral portions of green. The DMDs 501, 503, 505 and 507 are arranged such that the reflected spatially modulated light is reflected back, and recombined by the various  
5 dichroic mirrors 509, 511, 513 to produce a multi-wavelength spatially modulated light beam, which is then arranged to pass back along the optical axis of the system through a projection lens (not shown in Figure 5) and to be projected onto a projection screen (not shown  
10 in Figure 5).

It will be appreciated that where the spatial light modulators are in the form of a matrix of mirrored surfaces, then a handedness is provided at the reflection  
15 at the mirror array which produces the spatially modulated light. This will be compensated for by the subsequent reflection at the appropriate reflective surfaces 509, 511 or 515. In order to provide a compensatory reflective surface for the return light path  
20 from the spatial light modulator 507 a reflector 515 is provided the spatial light modulator 507 being positioned accordingly.

It will be appreciated that as in the first embodiment  
25 alternative splitters to the dichroic mirror 413 may be used. A particularly efficient way of splitting the green light is to introduce a polarized splitter such

- 13 -

that separated P-polarized and S-polarized green light within the same wavelength band is incident on the two spatial light modulators 505 and 507. Alternatively a half-silvered mirror may be used.

5

It will be appreciated that in the example given before, as white light generally contains more green light than red or blue light, there are two green spatial light modulators. However in some circumstances it may be appropriate to have some other combinations of light modulators which are effective to share the total light flux in convenient proportions amongst the spatial light modulators. For example, as white light typically comprises 30% red light, 60% green light and 10% blue light, the number of spatial light modulators sharing the total light flux in each colour channel can be set according to the light flux in each colour channel. Such an arrangement can be used to improve colour fidelity as well as enhancing light output from the same light input.

20

It will be appreciated that whilst the second embodiment is described in relation to the splitting of the input light into the primary colours red, blue and green, the invention is equally applicable to the splitting of the input light into the secondary colours yellow, magenta and cyan, or any other colour splitting scheme.

25

- 14 -

It will be seen that in the embodiment of the invention described in relation to Figure 5, the input light is split into three different colour components such that the three components are spatially modulated simultaneously. However, in a display system in accordance with the invention, light of different colours may be passed sequentially through the display system. Such an arrangement is shown in Figure 6 in which light from a light source comprising an arc lamp 601 and a condenser lens 603 is arranged to pass sequentially through different portions of a colour wheel 605 carrying red, blue and green filters. The wheel 605 is rotatable by a motor 607 about a central axis so as to superimpose in sequence, the red, blue and green filters in the light path from the light source 601, 603.

As in the first embodiment described in relation to Figure 4, a polarizing beam splitter 609 is placed in the light path, the polarizing beam splitter being effective to divide the incident light into P-polarized and S-polarized light components. The P-polarized light is directed towards a first spatial light modulator in the form of a DMD 611, whilst the S-polarized light is directed towards a second spatial light modulator DMD 613.

Spatially modulated light from the spatial light



- 15 -

modulators 611, 613 passes back to the beam splitter 609, which re-combines the S and P- polarized light and directs it towards a projection lens 515 for projection onto a projection screen (not shown).

5

The speed of rotation of the colour wheel 605 is chosen such that the time for light of all three different colour components to pass through the display system and be projected on the projection screen, is short enough  
10 such that the eyes of an observer watching the projection screen integrate the three different coloured projected images on the display screen, and a full colour image is seen by the observer.

15 It will be appreciated that as in the other embodiments described herebefore, whilst the use of a polarized splitter is particularly advantageous, other forms of splitter may be used.

20 It will also be appreciated that whilst the invention has particular application to display systems using spatial light modulators in the form of DMDs as such system are often limited by the flux handling capabilities of the DMDs, the invention is also applicable to display systems  
25 including other forms of spatial light modulators, for example liquid crystal devices.

- 16 -

CLAIMS

1. A display system comprising:
  - a light source;
  - at least two spatial light modulators;
  - 5 means for splitting light of the same spectral composition from the light source between the spatial light modulators;
  - means for combining spatially modulated light produced by the spatial light modulators to create an
  - 10 image for projection onto a display; and
  - means for displaying the combined light, the system being such that the combined light forming the image has a greater luminous flux than the light produced by each spatial light modulator.
  - 15
2. A display system comprising:
  - a multi wavelength light source;
  - a plurality of spatial light modulators;
  - wavelength selective means for splitting light of
  - 20 different spectral composition between the spatial light modulators;
  - means for combining spatially modulated light produced by the spatial light modulators; and
  - means for displaying the combined light;
  - 25 wherein there are provided sufficient spatial light modulators to increase the balance of the division of the luminous flux produced by the light source between the

- 17 -

spatial light modulators.

3. A display system according to either of the preceding claims wherein said means for displaying  
5 comprises:

means for projecting the combined light onto a projection screen.

4. A display system according to any one of the  
10 preceding claims wherein each spatial light modulator is a deflectable mirror array.

5. A display system according to any one of the preceding claims wherein each spatial light modulator is  
15 effective to reflect spatially modulated light, and wherein said means for splitting light is arranged additionally to combine the spatially modulated light reflected by the spatial light modulators.

20 6. A display system according to any one of the preceding claims wherein said means for splitting light comprises at least one polarized splitter effective to split the light incident thereon into P-polarized light and S-polarized light components.

25

7. A display system according to any one of the preceding claims wherein said means for splitting light

- 18 -

comprises:

at least one semi-reflective means which is effective to reflect part of the light incident thereon and to transmit the rest of the light incident thereon.

5

8. A display system according to any one of the preceding claims wherein said means for splitting light comprises a dichroic means.

10 9. A display system according to claim 8 wherein the dichroic means is arranged to split light within the same primary colour band.

10. A display system according to claim 9 in which there  
15 are provided at least two spatial light modulators in respect of two wavelength bands in the green light spectrum.

11. A display system according to any one of the  
20 preceding claims wherein each spatial light modulator is effective to reflect spatially modulated light, and in which the number of reflective means provided in the light path causes the spatially modulated combined light to undergo compensatory reflections to correct for any  
25 handedness imported by the spatial light modulators on the spatially modulated light.

- 19 -

12. A display system according to claim 1 and any one of claims 3 to 11 when dependent on claim 1, including means for sequentially directing light of different spectral compositions through the display system.

5

13. A display system substantially as hereinbefore described with reference to Figures 1, 2 and 3 of the accompanying drawings.

10 14. A method of using a display system as claimed in any one of Claims 1 to 13.

1/4

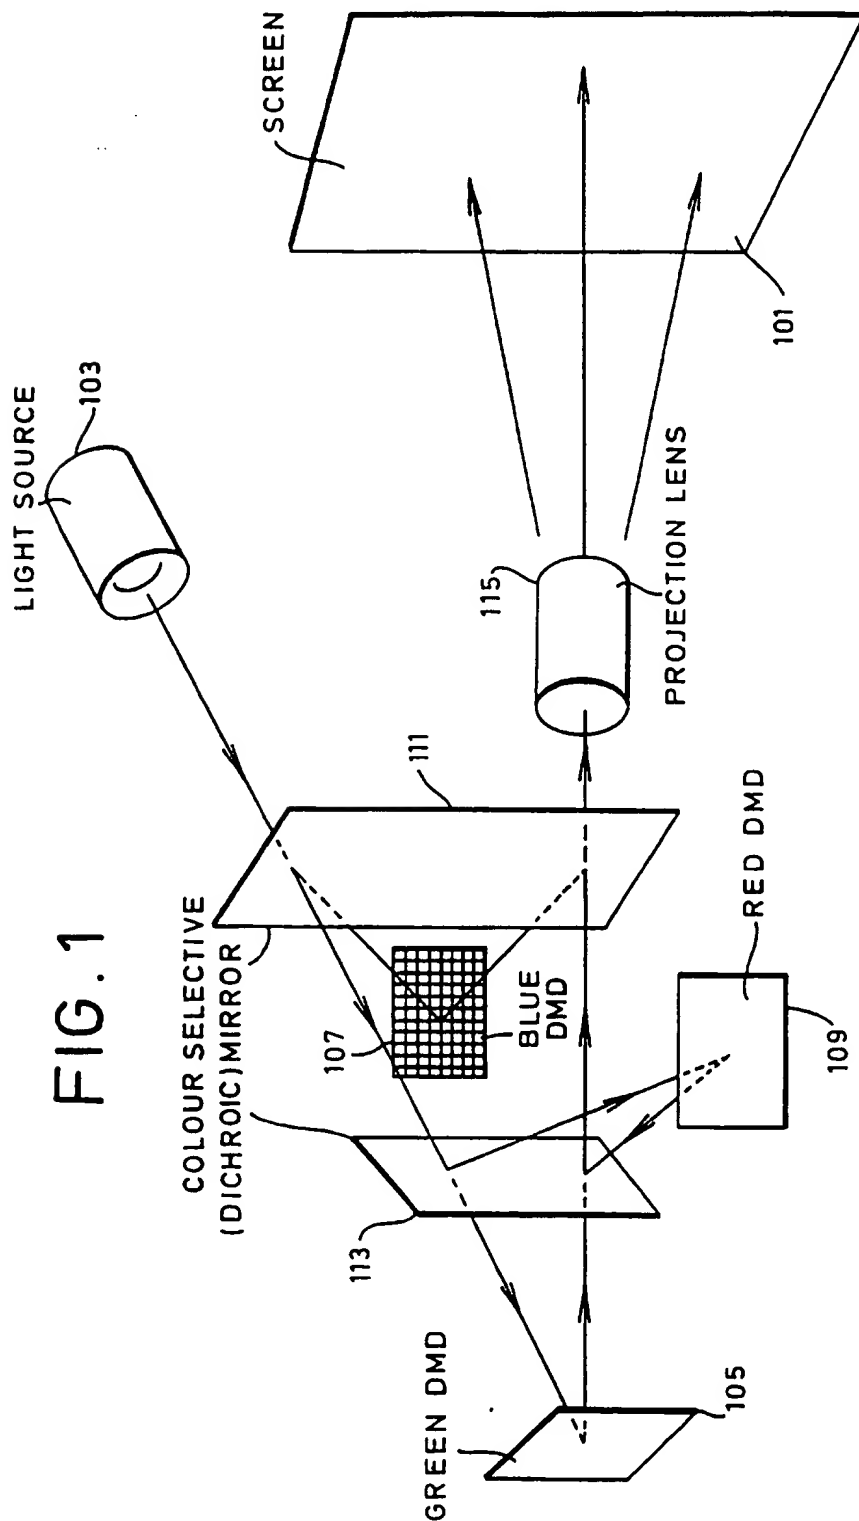


FIG. 2

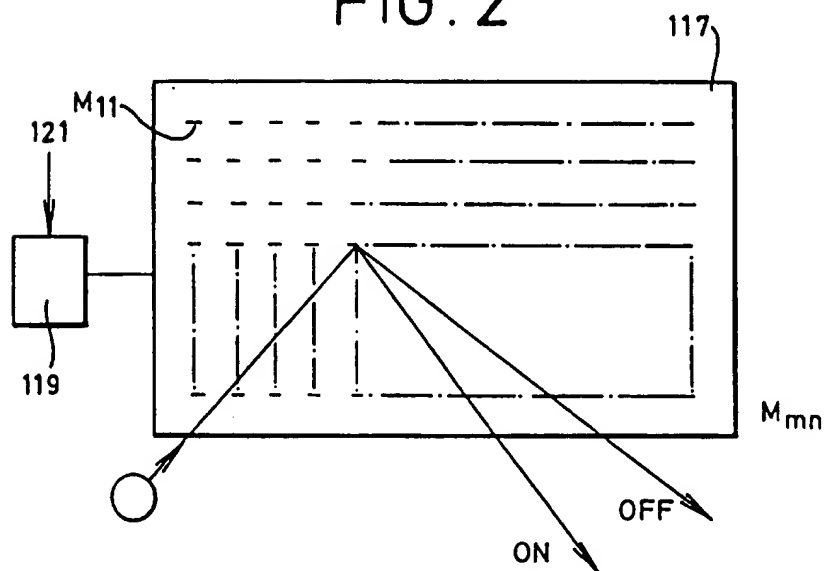


FIG. 3

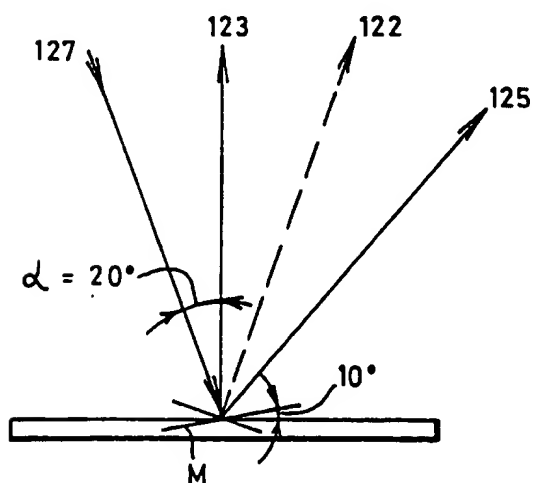


FIG. 4



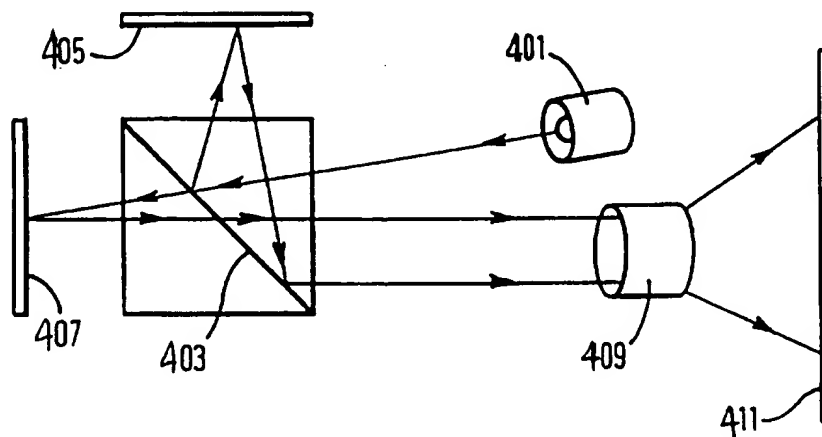


FIG. 5



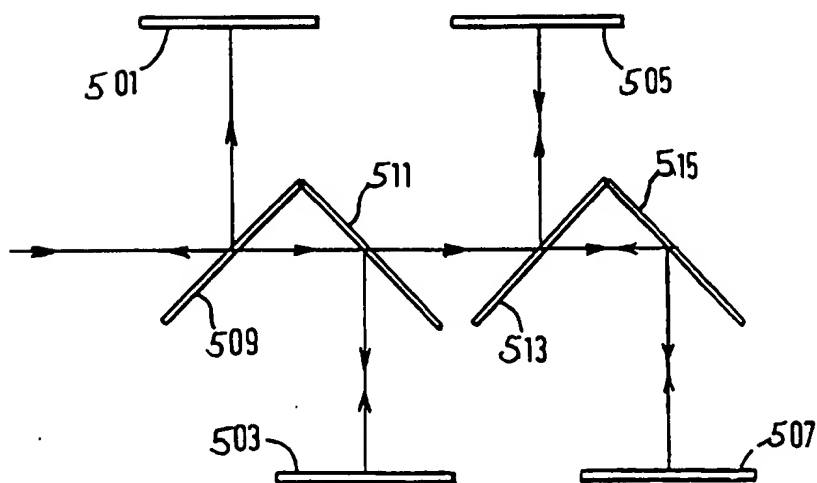

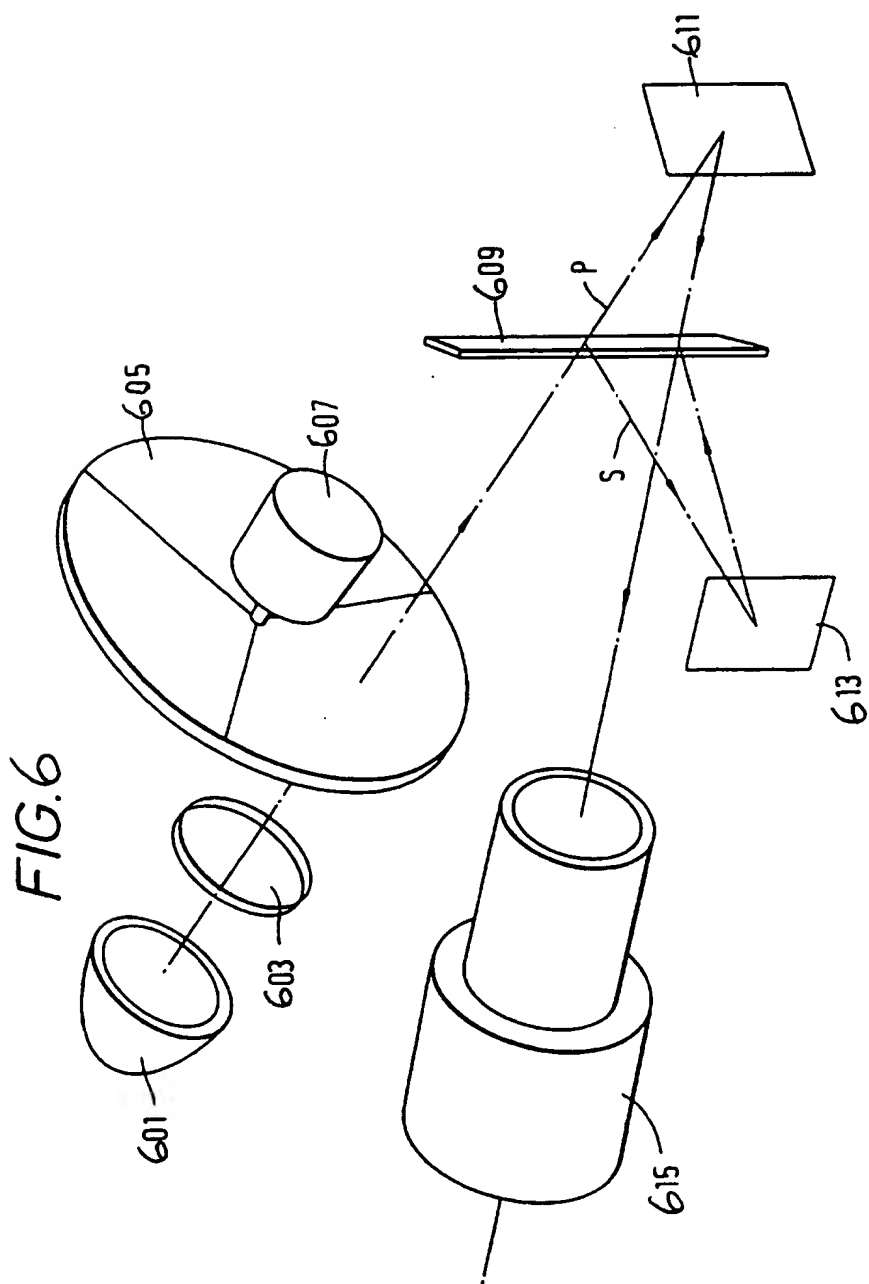

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/01842

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 G02B26/08 H04N9/31 G09F9/37		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 G02B H04N G09F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP,A,04 003 041 (SEIKO EPSON ) 8 January 1992 see abstract; figures ---	1-3,6,14
X	JP,A,06 075 541 (MATSUSHITA ELECTRIC ) 18 March 1994 see abstract; figures ---	1,2,6,14
X	WO,A,88 10545 (FRAUNHOFER GES FORSCHUNG) 29 December 1988 see the whole document ---	1,3,5,6,14 2,11,13
A	EP,A,0 560 636 (SHARP KK) 15 September 1993 see the whole document ---	1,3,5,6,12-14 2,11
	-/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
1 December 1995		15.12.95
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk T'd. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer  Ward, S

## INTERNATIONAL SEARCH REPORT

national Application No  
PCT/GB 95/01842

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 463 500 (HITACHI LTD) 2 January 1992	1,3,6,14
A	see column 15, line 13 - line 58 see column 16 - column 17 see column 18, line 1 - line 26 see figures 26,27 ---	2
X	US,A,5 042 921 (SATO MAKOTO ET AL) 27 August 1991	1,3,6,14
A	see column 16, line 8 - line 68 see column 17 - column 23 see column 24, line 1 - line 54 see figures 17-24 ---	2
X	EP,A,0 372 905 (SHARP KK) 13 June 1990	1,3,6,14
A	see the whole document ---	2
X	PATENT ABSTRACTS OF JAPAN vol. 016 no. 251 (P-1366) ,8 June 1992 & JP,A,04 057045 (SEIKO EPSON CORP) 24 February 1992, see abstract; figure ---	1,3,6,14
A	WO,A,92 13424 (RANK BRIMAR LTD) 6 August 1992 see the whole document ---	1-5,13, 14
A	US,A,5 035 475 (LEE YEON H ET AL) 30 July 1991 cited in the application see the whole document -----	1-5,13, 14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/GB 95/01842

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP-A-4003041	08-01-92	NONE	
JP-A-06075541	18-03-94	NONE	
WO-A-8810545	29-12-88	DE-A- 3720375	29-12-88
		DE-A- 3878910	08-04-93
		EP-A, B 0363407	18-04-90
		JP-T- 2503120	27-09-90
		US-A- 5028121	02-07-91
EP-A-0560636	15-09-93	JP-A- 5257110	08-10-93
EP-A-0463500	02-01-92	JP-A- 4061141	27-02-92
		US-A- 5260728	09-11-93
US-A-5042921	27-08-91	NONE	
EP-A-0372905	13-06-90	JP-A- 2153336	13-06-90
		KR-B- 9406261	13-07-94
		US-A- 5172254	15-12-92
WO-A-9213424	06-08-92	GB-A- 2252172	29-07-92
		GB-A- 2252173	29-07-92
		EP-A- 0568603	10-11-93
		US-A- 5424868	13-06-95
US-A-5035475	30-07-91	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**